



ST-3701


Scope Mount Ø30 H35mm/1.378" 7MIL TRG

Direct mount for use on SAKO TRG-22,
TRG-42 and Tikka T3x dovetails

Rings: 30 mm
Tilt: 7 MIL/24 MOA
Height: 35 mm/1.378"
Length: 126 mm/4.96"
Weight: 241 g/8.5 oz
Interfaces: 7 sets
EAN: 7340150700577



The **IDEAL SCOPE MOUNT SYSTEM** series of mounts feature **seven set of interfaces to attach any of more than 40 different accessories**, and has a bubble level integrated in the rear plane of the mount body to prevent canting of the rifle. The rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

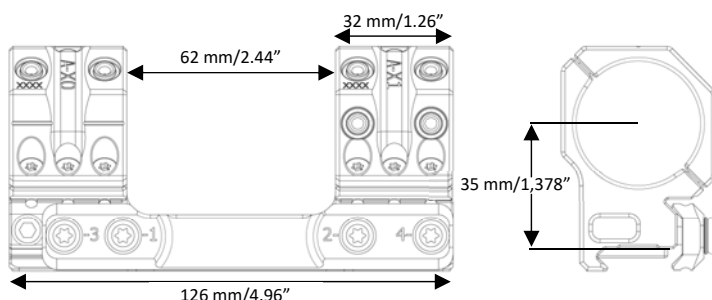

The mounts are machined from billet 7075 T651 aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance. The screws come pre-waxed from the factory to ensure proper torque values.

The mount is shipped with an adjustable recoil screw, a manual, and a "wedge" leveling key.

NOTE:

The ST-3701 is designed for use on SAKO TRG-22, TRG-42 and Tikka T3x dovetails instead of MIL-STD-1913 or STANAG 4694 rails. The ST-3701 will fit most 30 mm scope tubes except for scopes with extended erector housings, such as the US Optics TPAL/EREK.